
SUPER X PERFORMANCE

OUTDOOR & INDOOR RUNNING TRACK



SUPER X PERFORMANCE



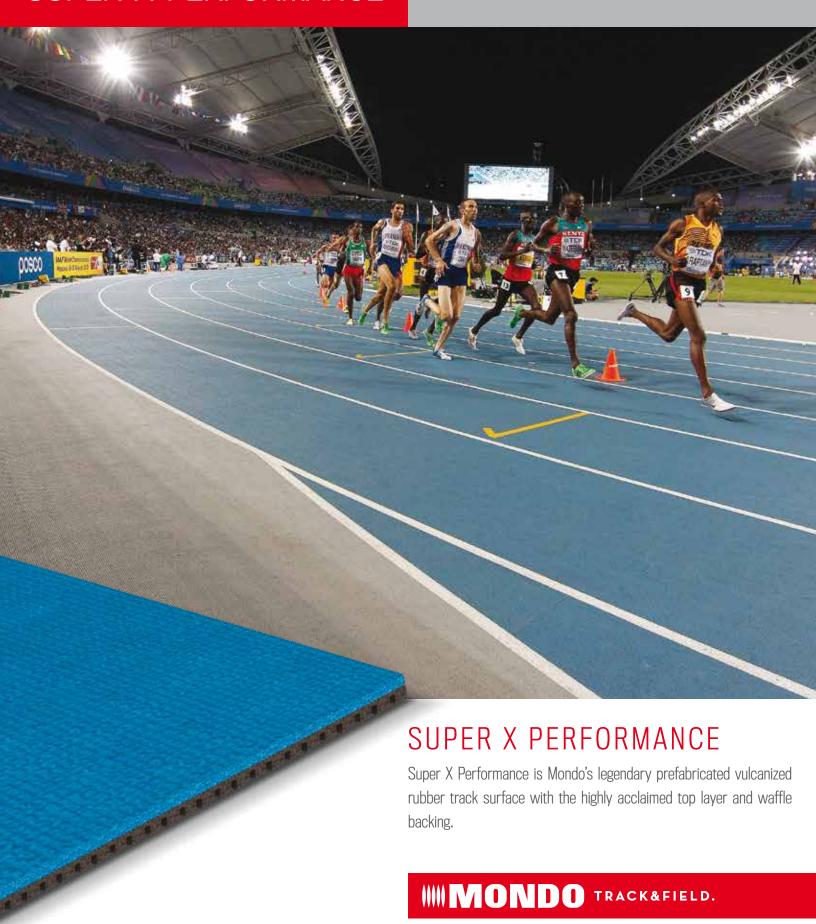



SPECIFICATIONS

Roll Width:

Roll Length:

Roll Width:

Texture:	Super X Performance Embossing
Thickness:	15/64" (6mm) 5/16" (8mm)

4' 0" - 6' 0" (1.22m - 1.83m) 49' 2" (15m)*

17/32" (13.5mm)

Thickness: 3/8" (10mm) 1/2" (12mm)

> 3' 0" - 5' 6" (0.92m - 1.70m)

Roll Length: 49' 2" (15m)*

KEY BENEFITS

- · Highly durable; withstands static and rolling loads
- Embossed for superior traction indoors and outdoors
- · Shock absorption layer for safety and comfort
- · Stain resistant, no specialized maintenance needed
- · Non-slip surface for ease in maneuvering wheelchairs
- · Designed to channel water away for high performance in all conditions

EXPERIENCE

Mondo's proprietary equipment and vulcanization process ensure that biomechanical and physical properties stay consistent over the product's long lifespan.

HEALTH AND SAFETY

- · GREENGUARD GOLD certified for better indoor air quality
- · 100% recyclable
- · Meets ADA requirements

- Contributes toward LEED points
- · Granular-free for healthy waterways
- · Heavy metals free and will not leach into the environment
- · Excellent bacterial, microbial and fungal resistance properties













Red P30



Cognac P58



Green P10



Dark Green P14



Medium Blue P18



Light Blue P85





Light Grey P70

^{*}Average length from production.